

LIGHT SOURCES

3W-50W MR16 LAMPS ONLY:

- 12V Halogen or 12V LED Compatible
- Lamps Sold Separately

BI-PIN SOCKET: GU5.3

OPTICS

ADJUSTABLE/HORIZONTAL

AIMING: Up to 90° tilt from vertical axis and up to 355° rotation around vertical axis.

DESIGN:

Unique Integral Construction

FINISH/COLORS: Anodized (Clear)

PRODUCTION PROCESS:

CNC Precision-Spun

MATERIAL: Specification-Grade Aluminum Alloy, .060" Thick

CONSTRUCTION

MATERIAL:

- **2741:** Molded Polymer with Steel Lamp Module
- **2742:** Molded Polymer with Die-Cast Steel Lamp Module

FINISH/COLORS:

- Powdercoat Paint Colors (2)
 - Black (BK)
 - White (WH)

DIMENSIONS:

- **2741:**
 - 4 7/8" H x 2 1/8" Dia. (Small Gimbal Ring)
- **2742:**
 - 5 1/2" H x 2 1/4" Dia. (Small Round Back)

INSTALLATION

MOUNTING:

- Mounts to 120V AC *QuantaLight* Track Systems
 - TSQ1: 1-Circuit/1-Neutral (1C1N)
 - TSQ2: 2-Circuit/1-Neutral (2C1N)
- Mounts to 1-Circuit or 2-Circuit Track System Platforms

ADAPTERS: Listed Components

TRANSFORMER

OUTPUT POWER SUPPLY: Class II

POWER FACTOR (Pf): >.9

THD: <20%

INPUT VOLTAGE: 120V at 50/60 Hz (System Adapter Dependant)

DIMMING: TRIAC/ELV 5% dimmable on the input primary, line-side circuit of the track system. Consult dimmer manufacturer for compatibility and conditions of use.

COMPLIANCES/WARRANTY

 cETLus LISTED

 RoHS COMPLIANT

 LED COMPATIBLE

 DRY LOCATIONS ONLY

TRACK HEAD MODEL

2741

TRACK ADAPTER

Q2 1C1N & 2C1N (120V)


FINISH

- 5 Black (Painted)
- 6 White (Painted)

2741/2742

INCANDESCENT/LED TRACK HEADS

2741

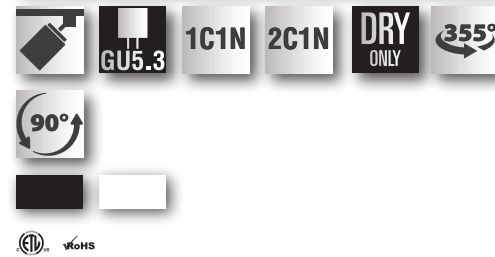

TRACK HEAD MODEL

2742


TRACK ADAPTER

Q2 1C1N & 2C1N (120V)

FINISH

- 5 Black (Painted)
- 6 White (Painted)

2742

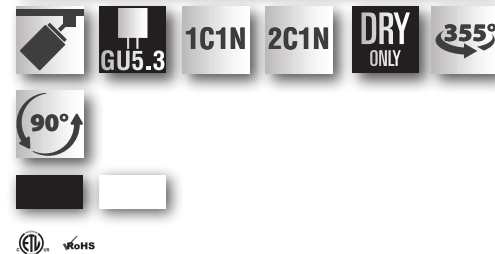

QWICK COMMERCIAL | TRACK | TRACK LUMINAIRES | TRACK HEADS | INCANDESCENT | 2741/2742