

## LIGHT SOURCES

### 3W-50W MR16 LAMPS ONLY:

- 12V Halogen or 12V LED Compatible
- Lamps Sold Separately

BI-PIN SOCKET: GU5.3

## OPTICS

### ADJUSTABLE/HORIZONTAL

**AIMING:** Up to 90° tilt from vertical axis and up to 355° rotation around vertical axis.

### DESIGN:

Unique Integral Construction

**FINISH/COLORS:** Anodized (Clear)

### PRODUCTION PROCESS:

CNC Precision-Spun

**MATERIAL:** Specification-Grade Aluminum Alloy, .060" Thick

## CONSTRUCTION

### MATERIAL:

- **2741:** Molded Polymer with Steel Lamp Module
- **2742:** Molded Polymer with Die-Cast Steel Lamp Module

### FINISH/COLORS:

- Powdercoat Paint Colors (2)
  - Black (BK)
  - White (WH)

### DIMENSIONS:

- **2741:**
  - 4<sup>7</sup>/<sub>8</sub>" H x 2<sup>1</sup>/<sub>8</sub>" Dia. (Small Gimbal Ring)
- **2742:**
  - 5<sup>1</sup>/<sub>2</sub>" H x 2<sup>1</sup>/<sub>4</sub>" Dia. (Small Round Back)

## INSTALLATION

### MOUNTING:

- Mounts to 120V AC *QuantaLight* Track Systems
  - TSQ1: 1-Circuit/1-Neutral (1C1N)
  - TSQ2: 2-Circuit/1-Neutral (2C1N)
- Mounts to 1-Circuit or 2-Circuit Track System Platforms

**ADAPTERS:** Listed Components

## TRANSFORMER

**OUTPUT POWER SUPPLY:** Class II

**POWER FACTOR (Pf):** >.9

**THD:** <20%

**INPUT VOLTAGE:** 120V at 50/60 Hz (System Adapter Dependant)

**DIMMING:** TRIAC/ELV 5% dimmable on the input primary, line-side circuit of the track system. Consult dimmer manufacturer for compatibility and conditions of use.

## COMPLIANCES/WARRANTY

 cETLus LISTED

 RoHS COMPLIANT

 LED COMPATIBLE

 DRY LOCATIONS ONLY

### TRACK HEAD MODEL

2741

### TRACK ADAPTER

Q2 1C1N & 2C1N (120V)


### FINISH

- 5 Black (Painted)
- 6 White (Painted)

# 2741/2742

## INCANDESCENT/LED TRACK HEADS

# 2741

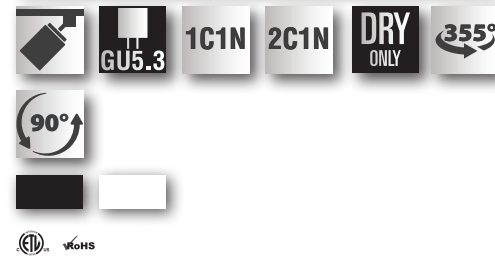

### TRACK HEAD MODEL

2742


### TRACK ADAPTER

Q2 1C1N & 2C1N (120V)

### FINISH

- 5 Black (Painted)
- 6 White (Painted)

# 2742

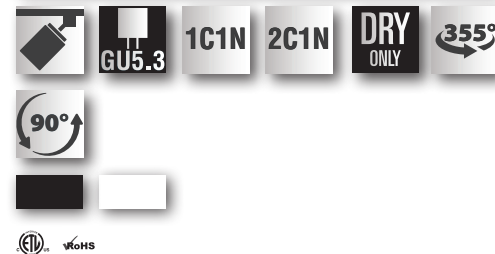

QWICK COMMERCIAL | TRACK | TRACK LUMINAIRES | TRACK HEADS | INCANDESCENT | 2741/2742