


FEATURES     **DRY ONLY**

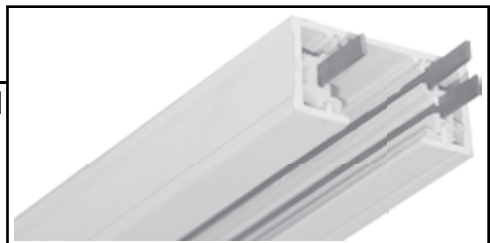

ELECTRICAL

ELECTRICAL CAPACITY: 20 Amps

POLARITY/GROUND:

Completely polarized and grounded.

POLARITY GROOVE:

Grooved track side indicates polarity. Use to ensure electrical installation meets NEC codes and standards.

MOUNTING:

Ceiling mounting recommended. Consult factory for alternate mounting configurations.

INSTALLATION

LINEAR/GRID CONFIGURATIONS: May be installed in linear or grid configurations.

FIELD-CUTTABLE TRACK SECTIONS:

Track sections are field cuttable.

COMPLIANCES/WARRANTY

cULus LISTED

TITLE 24: Current limiting feeds approved by the California Energy Commission to meet the requirements of Title 24. Current limiting feeds comply with ASHRAE90.1 and IECC Section 805.5.1.4 for track current limiting.

5-YEAR LIMITED WARRANTY

RoHS COMPLIANT
DRY LOCATIONS ONLY

Catalog #:

Type:


Project:

Prepared By:


AT A GLANCE

The *QuantaLight* 1-Circuit/1-Neutral (1C1N), 120V AC track lighting system is the solution to dimming intensive, accent lighting applications. The system is designed for concise control of a single 20 amp circuit and comes in 2', 4', 6', and 8' lengths. The structural housing channel is made from extruded aluminum and is available in two finishes—black and white.

CONNECTORS

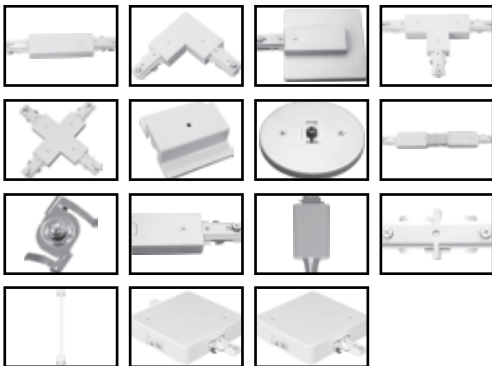

ACCESSORIES

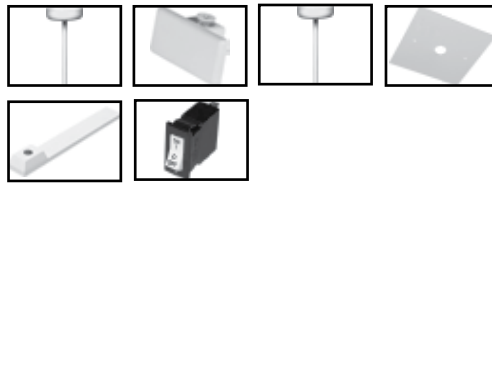

ORDER CONFIGURATOR

To order, select one option from each Track System table column to configure the desired track system product catalog code. Then, fill in the boxes below (e.g., Track System #: TSQ1-08-6-1). To order additional items (optional), select the desired option(s) from each table column in the Optional section. Then, fill in the dashed box(es).

TRACK SYSTEM

TSQ1			1
------	--	--	---

OPTIONAL

TS MODEL	LENGTH	FINISH	VOLTAGE
----------	--------	--------	---------

- | | | | |
|--|-----------------------------------|---|--|
| <input checked="" type="checkbox"/> TSQ1 | <input type="checkbox"/> 02 2 Ft. | <input type="checkbox"/> 5 Black (Painted) | <input checked="" type="checkbox"/> 1 120V |
| | <input type="checkbox"/> 04 4 Ft. | <input type="checkbox"/> 6 White (Painted) | |
| | <input type="checkbox"/> 06 6 Ft. | <input type="checkbox"/> 20 Silver Gray (Painted) | |
| | <input type="checkbox"/> 08 8 Ft. | | |


CONNECTORS (SOLD SEPARATELY)

- | | |
|--|---|
| <input type="checkbox"/> Q2712 Straight Connector | <input type="checkbox"/> Q2791 12" Extension Wand |
| <input type="checkbox"/> Q2713 "L" Connector (90°) | <input type="checkbox"/> Q2795 18" Extension Wand |
| <input type="checkbox"/> Q2714 Live End J-Box Feed | <input type="checkbox"/> Q2792 24" Extension Wand |
| <input type="checkbox"/> Q2715 "T" Connector | <input type="checkbox"/> Q2793 36" Extension Wand |
| <input type="checkbox"/> Q2716 "X" Connector | <input type="checkbox"/> Q2794 48" Extension Wand |
| <input type="checkbox"/> Q2717 Floating Canopy | |
| <input type="checkbox"/> Q2718 Monopoint Canopy | |
| <input type="checkbox"/> Q2719 Flexible Connector | |
| <input type="checkbox"/> Q2721 T-Bar Clip | |
| <input type="checkbox"/> Q2722 Live End Connector | |
| <input type="checkbox"/> Q2723 Pendant Track Adapter | |
| <input type="checkbox"/> Q2724 Mini Joiner | |

ACCESSORIES (SOLD SEPARATELY)

- | |
|---|
| <input type="checkbox"/> Q18 Pendant Kit (18" Steel Stem) |
| <input type="checkbox"/> Q36 Pendant Kit (36" Steel Stem) |
| <input type="checkbox"/> Q48 Pendant Kit (48" Steel Stem) |
| <input type="checkbox"/> Q2701 Dead End |
| <input type="checkbox"/> Q2704 Outlet Box Cover |
| <input type="checkbox"/> Q2705 Wireway Cover for Pendant Assembly Kit |

Track Section

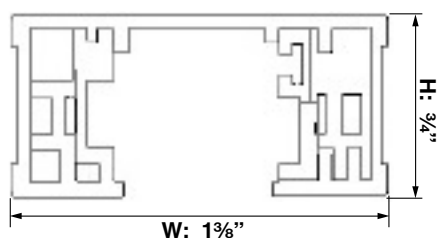

- | |
|---|
| <input type="checkbox"/> QCL1LF Current Limiter In-Line Feed (If <input checked="" type="checkbox"/> QCL1LF, select a Circuit Breaker for single circuit operation. Optionally select a second Circuit Breaker for dual circuit use.) |
| <input type="checkbox"/> QCL1EF Current Limiter End Feed (If <input checked="" type="checkbox"/> QCL1EF, select a Circuit Breaker.) |

CIRCUIT BREAKERS

- | |
|---|
| <input type="checkbox"/> CB120 120W Circuit Breaker (1A at 120V) |
| <input type="checkbox"/> CB300 300W Circuit Breaker (2.5A at 120V) |
| <input type="checkbox"/> CB600 600W Circuit Breaker (5A at 120V) |
| <input type="checkbox"/> CB960 960W Circuit Breaker (8A at 120V) |
| <input type="checkbox"/> CB1200 1200W Circuit Breaker (10A at 120V) |