

**APPLICATIONS**

- NEW CONSTRUCTION, COMMERCIAL, OR RESIDENTIAL:**
- 8672
- COMMERCIAL OR RESIDENTIAL:**
- 8673

**LIGHT SOURCES**

**LED/INCANDESCENT COMPATIBILITY:**

- LED (150 Watts Max)
- Incandescent (150 Watts Max)
- Lamps Sold Separately (Refer to Compatible Trims for Compatible Lamp Types and Sizes)

**EDISON BASE LAMPHOLDER:**

- Medium Base (E26)

**THERMAL MANAGEMENT:** Passive

**COMPATIBLE TRIMS**

**FINISH/COLORS/TRIM:**

- See Compatible Trims Next Page

**INSTALLATION**

**CEILING:**

- Type IC
  - Suitable for Direct Contact with Insulation
- 6 5/8" Ceiling Cutout Size
- Use with Slopes from 1/12 to 1/2

**MOUNTING:**

- **8672**
  - Adjustable Hanger Bars (14" to 24")
- **8673**
  - Spring Clips Allow for Fast and Easy Installation

**J-BOX WIRING:**

- **8672**
  - Integral Thru-Branch, 4 In/4 Out
- **8673**
  - Integral Thru-Branch, 2 In/2 Out

**COMPLIANCES/WARRANTY**

- cULus LISTED**
- SUITABLE FOR DAMP LOCATIONS**
- LED COMPATIBLE**
- RECESSED DOWNLIGHT**



# 86 Series Sloped Ceiling

## 6" DIA. INCANDESCENT/LED SLOPED CEILING RECESSED DOWNLIGHT

8672

RECESSED DOWNLIGHT MODEL  8672

**QUICK VIEW**

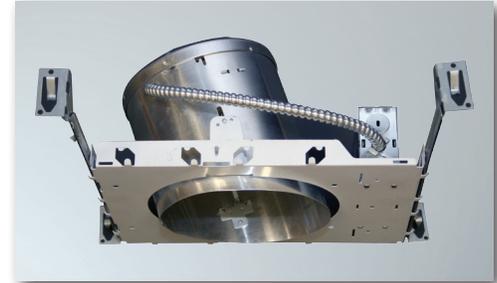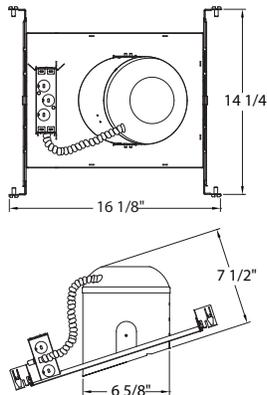


## 6" DIAMETER INCANDESCENT/LED SLOPED CEILING RECESSED REMODEL

8673

REMODEL DOWNLIGHT MODEL  8673

**QUICK VIEW**

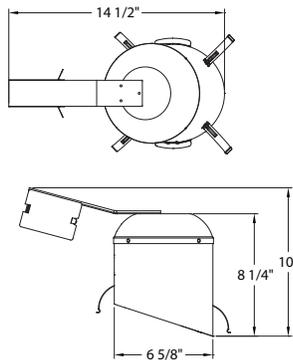

### Trims Compatible with 8672 & 8673

8017



- 8017-6 Stepped Baffle**  
8" Outside Diameter  
Non-IC/IC  
150W PAR38/R40
- 8017-3 Stepped Baffle**  
8" Outside Diameter  
Non-IC/IC  
150W PAR38/R40
- 8017-5 Stepped Baffle**  
8" Outside Diameter  
Non-IC/IC  
150W PAR38/R40

**QUICK VIEW**

