

LED LIGHT ENGINE

WATTS/LUMENS: 10W/650 lm

CRI/CCT:

▪ 8417 or 8423: 90/3000K

▪ 8419 or 8424: 90/4000K

POWER FACTOR (P_f): > .95

INPUT VOLTAGE: 120V at 50/60 Hz

STARTING TEMPERATURE:

↓ -20°C

OPERATING TEMPERATURE:

↓ <80°C

DIMMING: ✨ 10% of Output

EDISON ADAPTER: Medium Base (E26) with Connector (Compatible with Incandescent Downlights)

LENS COVER: Sealed and Frosted

MATERIAL: All-Aluminum Construction (Housing and Trim)

LIFE (RATED):

50,000 hours based on LED testing per LM80-08 and projected values from IESNA TM21-11.

CONSTRUCTION

FINISH:

- White (Painted)
- Brushed Nickel
- Antique Bronze

INSTALLATION

CEILING:

- Type IC or Non-Type IC
 - Type IC Suitable for Direct Contact with Insulation
 - Non-Type IC Insulation to Be Kept 3" Away

SUITABLE FOR INDOOR OR OUTDOOR USE

COMPLIANCES/WARRANTY

ULus LISTED

NATIONAL ELECTRICAL

CODE 410.16 (C1-5): Code

C5 for closet luminaire when installed per code.

5-YEAR LIMITED WARRANTY

SUITABLE FOR WET LOCATIONS

ENERGY-EFFICIENT

LED

RECESSED DOWNLIGHT



84 Series (Cont.)

4" DIAMETER LED RECESSED RETROFIT DOWNLIGHT

8417/8419

RECESSED
DOWNLIGHT
MODEL

□8417 (3000K)

□8419 (4000K)

FINISH

□6 White (Painted)

□33 Brushed Nickel

□79 Antique Bronze



RECESSED
DOWNLIGHT
MODEL

□8423 (3000K)

□8424 (4000K)


FINISH

□6 White (Painted)

□33 Brushed Nickel

□79 Antique Bronze

8423/8424

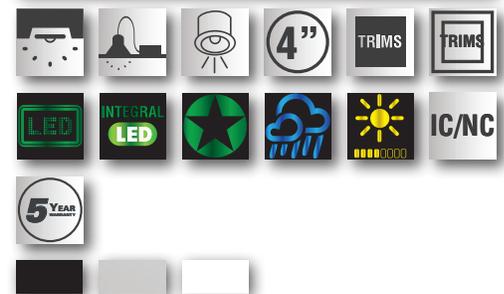

RESIDENTIAL | RECESSED DOWNLIGHTS | 4" Diameter | 84 Series (Continued)