

LED LIGHT ENGINE

WATTS/LUMENS:

- 8622 or 8633: 15W/950 lm
- 8641 or 8643: 17W/1100 lm

CRI/CCT:

- 8622 or 8641: 90/3000K
- 8633 or 8643: 90/4000K

POWER FACTOR (Pf):

> .95

INPUT VOLTAGE:

120V at 50/60 Hz

STARTING TEMPERATURE:

-20°C

OPERATING TEMPERATURE:

<80°C

DIMMING:

10% of Output

LENS COVER:

Sealed and Frosted

MATERIAL:

All-Aluminum

Construction (Housing and Trim)

LIFE (RATED):

50,000 hours based on LED testing

per LM80-08 and projected values

from IESNA TM21-11.

CONSTRUCTION

FINISH:

- White (Painted)
- Brushed Nickel
- Antique Bronze

INSTALLATION

CEILING OR WALL J-BOX

INSTALLATION:

- Installs and fits both 3" and

4" junction boxes easily.

SUITABLE FOR INDOOR OR

OUTDOOR USE

COMPLIANCES/WARRANTY

cULus LISTED

NATIONAL ELECTRICAL

CODE 410.16 (C1-5): Code

C5 for closet luminaire when

installed per code.

5-YEAR LIMITED WARRANTY

SUITABLE FOR WET

LOCATIONS

ENERGY-EFFICIENT

LED


RECESSED DOWNLIGHT

86 Series (Cont.)

LED SURFACE MOUNT (CEILING OR WALL)


8622/8633/8641/8643

SURFACE	<input type="checkbox"/> 8622 (3000K, 15W/950lm)
MOUNT	<input type="checkbox"/> 8633 (4000K, 15W/950lm)
MODEL	<input type="checkbox"/> 8641 (3000K, 17W/1100lm)
	<input type="checkbox"/> 8643 (4000K, 17W/1100lm)
FINISH	<input type="checkbox"/> 6 White (Painted)
	<input type="checkbox"/> 33 Brushed Nickel
	<input type="checkbox"/> 79 Antique Bronze

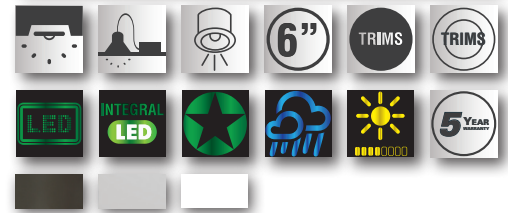

RESIDENTIAL | SURFACE MOUNTS | 86 Series (Continued)

QUICK VIEW

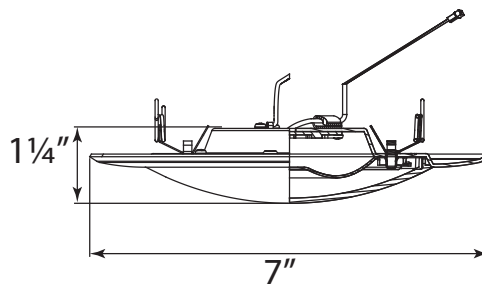

Super Thin Profile: 3" or 4" Box



INSTALLATION

Junction Box Installation

