

LED LIGHT ENGINE

WATTS/LUMENS: 13W/800 lm
CRI/CCT: 80/4000K
POWER FACTOR (Pf): >.95
INPUT VOLTAGE: 120V at 50/60 Hz
STARTING TEMPERATURE:
 ⚡ -20°C
OPERATING TEMPERATURE:
 ⚡ <80°C
DIMMING: 10% of Output
EDISON ADAPTER: Medium Base (E26) with Connector (Compatible with Incandescent Downlights)
LENS COVER: Sealed and Frosted
MATERIAL: All-Aluminum Construction (Housing and Trim)
LIFE (RATED):
 50,000 hours based on LED testing per LM80-08 and projected values from IESNA TM21-11.

INSTALLATION

CEILING:

- Type IC or Non-Type IC
 - Type IC Suitable for Direct Contact with Insulation
 - Non-Type IC Insulation to Be Kept 3" Away

MOUNTING:


- Dual-Torsion Spring Mounting Assemblies
- Integral Mounting Springs

SUITABLE FOR INDOOR OR OUTDOOR USE

COMPLIANCES/WARRANTY

- cULus LISTED**
- 5-YEAR LIMITED WARRANTY**
- SUITABLE FOR WET LOCATIONS**
- ENERGY-EFFICIENT**
- LED**
- RECESSED DOWNLIGHT**

- RETROFIT**
DOWNLIGHT 8624
MODEL
FINISH 6 White (Painted)

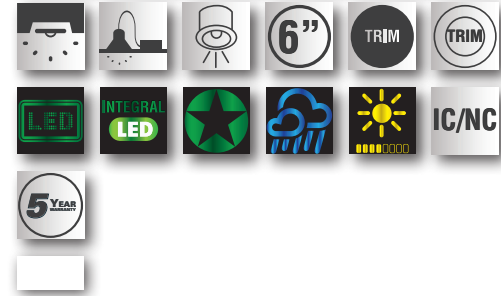

cULus

QUICK VIEW

