

FEATURES 

LED LIGHT ENGINE

WATTS/LUMENS: 15W/1000 lm

CRI/CCT: 80/3000K

BINNING: 3 SDCM

THERMAL MANAGEMENT: Passive

LIFE (RATED): 50,000 hours based on LED testing per LM80-08 and projected values from IESNA TM21-11.

LED DRIVER

OUTPUT POWER SUPPLY: Class II

POWER FACTOR (P_f): >.9

THD: <20%

INPUT VOLTAGE: 120V at 50/60 Hz

DIMMING:

* TRIAC/ELV, 5% (120V AC Only)

CONSTRUCTION

HOUSING: Formed & Welded All-Aluminum

FINISH:

- Powdercoat Paint Colors (4)
 - Black (BK)
 - White (WH)
 - Antique Bronze (AB)
 - Silver Gray (SL)

INSTALLATION

SIZE: 5" Dia. x 6¾" H x 44" OAH

MOUNTING:

- Surface mounting by pendant only. Integral stems and mounting canopy assembly secures luminaire to junction box.
- Hang-Straight Canopy
 - 0° to 90°

COMPLIANCES/WARRANTY

 **cULus LISTED**

 **FCC COMPLIANT**

 **2-YEAR LIMITED WARRANTY**


 **RoHS COMPLIANT**

 **SUITABLE FOR DAMP LOCATIONS**

 **ENERGY-EFFICIENT**

 **LED**

 **DOWNLIGHT CYLINDER**

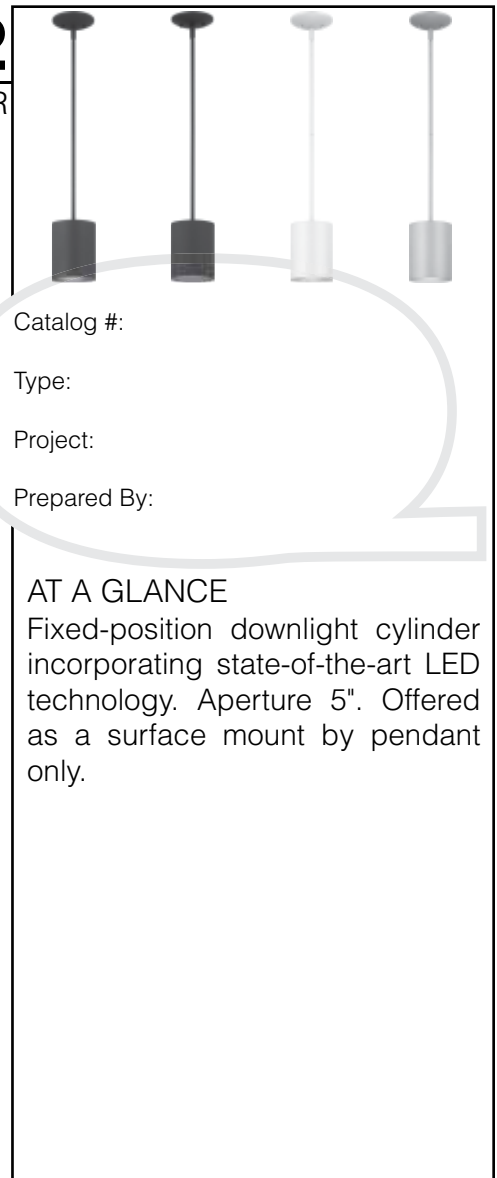

ORDER CONFIGURATOR

To order, select one option from each table column to configure the desired cylinder product catalog code. Then, fill in the boxes below (e.g., Cylinder #: CL502-30-10-LELV-AB-1).

CYLINDER #					
CL502	30	10	LELV		1
CYLINDER MODEL	CCT	LUMENS	DIMMING	FINISH	VOLTAGE
<input checked="" type="checkbox"/> CL502	<input checked="" type="checkbox"/> 30 3000K	<input checked="" type="checkbox"/> 10 1000 lm	<input checked="" type="checkbox"/> LELV Flicker-Free TRIAC/ELV, 5% (120V Only)	<input type="checkbox"/> BK Black (Painted) <input type="checkbox"/> WH White (Painted) <input type="checkbox"/> AB Antique Bronze (Painted) <input type="checkbox"/> SL Silver Gray (Painted)	<input checked="" type="checkbox"/> 1 120V

QUICK VIEW

