

FEATURES    

LED LIGHT ENGINE

WATTS/LUMENS: 15W/1000 lm
CRI/CCT: 80/3000K
BINNING: 3 SDCM
THERMAL MANAGEMENT: Passive
LIFE (RATED): 50,000 hours based on LED testing per LM80-08 and projected values from IESNA TM21-11.

LED DRIVER

OUTPUT POWER SUPPLY: Class II
POWER FACTOR (P_f): >.9
THD: <20%
INPUT VOLTAGE: 120V at 50/60 Hz
DIMMING:
 * TRIAC/ELV, 5% (120V AC Only)

CONSTRUCTION

HOUSING: Formed & Welded All-Aluminum
FINISH:






- Powdercoat Paint Colors (4)
 - Black (BK)
 - White (WH)
 - Antique Bronze (AB)
 - Silver Gray (SL)



INSTALLATION


SIZE: 6" Dia. x 12" H x 50" OAH
MOUNTING:

- Surface mounting by pendant only. Integral stems and mounting canopy assembly secures luminaire to junction box.
- Hang-Straight Canopy
 - 0° to 90°

COMPLIANCES/WARRANTY

 **cULus LISTED**
 **FCC COMPLIANT**
 **2-YEAR LIMITED WARRANTY**
 **RoHS COMPLIANT**
 **SUITABLE FOR DAMP LOCATIONS**

 **ENERGY-EFFICIENT LED**
 **DOWNLIGHT CYLINDER**

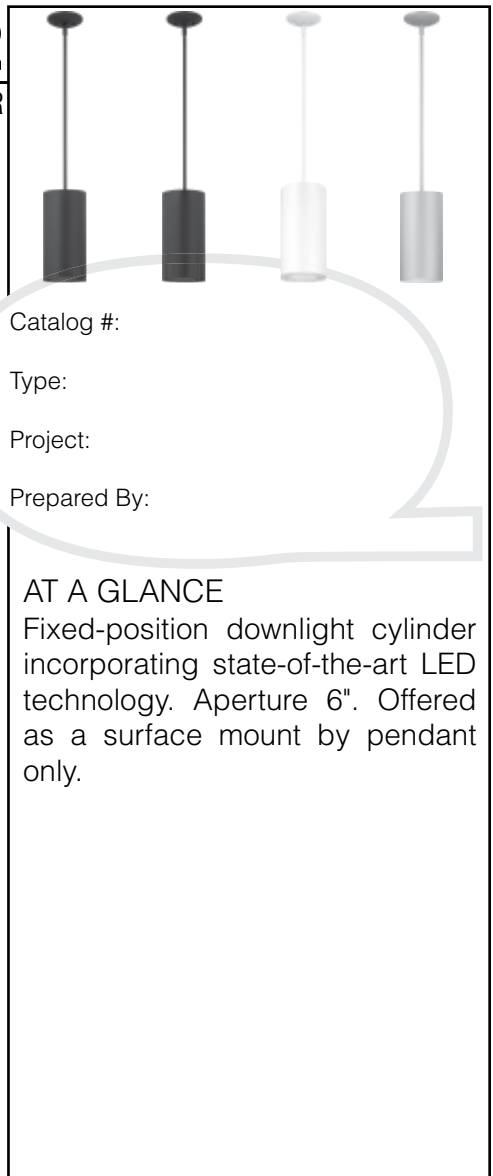

ORDER CONFIGURATOR

To order, select one option from each table column to configure the desired cylinder product catalog code. Then, fill in the boxes below (e.g., Cylinder #: CL602-30-10-LELV-AB-1).

CYLINDER #					
CL602	30	10	LELV		1
CYLINDER MODEL	CCT	LUMENS	DIMMING	FINISH	VOLTAGE
<input checked="" type="checkbox"/> CL602	<input checked="" type="checkbox"/> 30 3000K	<input checked="" type="checkbox"/> 10 1000 lm	<input checked="" type="checkbox"/> LELV Flicker-Free TRIAC/ELV, 5% (120V Only)	<input type="checkbox"/> BK Black (Painted) <input type="checkbox"/> WH White (Painted) <input type="checkbox"/> AB Antique Bronze (Painted) <input type="checkbox"/> SL Silver Gray (Painted)	<input checked="" type="checkbox"/> 1 120V

