QuantaLight™

SPECIFICATION SHEET

CL602

CYLINDER

Catalog #:

Type:

Project:

Prepared By:

AT A GLANCE

Fixed-position downlight cylinder incorporating state-of-the-art LED technology. Aperture 6". Offered as a surface mount by pendant only.

FEATURES

LED LIGHT ENGINE

WATTS/LUMENS: 15W/1000 lm
CRI/CCT: 80/3000K
BINNING: 3 SDCM
THERMAL MANAGEMENT: Passive
LIFE (RATED): 50,000 hours based on LED testing per LM80-08 and projected values from IESNA TM21-11.

LED DRIVER

OUTPUT POWER SUPPLY: Class II
POWER FACTOR (Pf): >.9
THD: <20%
INPUT VOLTAGE: 120V at 50/60 Hz
DIMMING:
TRIAC/ELV, 5% (120V AC Only)

CONSTRUCTION

HOUSING: Formed & Welded All-Aluminum
FINISH:

- Powdercoat Paint Colors (4)
  - Black (BK)
  - White (WH)
  - Antique Bronze (AB)
  - Silver Gray (SL)

INSTALLATION

SIZE: 6" Dia. x 12" H x 50" OAH
MOUNTING:

- Surface mounting by pendant only. Integral stems and mounting canopy assembly secures luminaire to junction box.
- Hang-Straight Canopy
  - 0° to 90°

COMPLIANCES/WARRANTY

cULus LISTED
FCC COMPLIANT
5-YEAR LIMITED WARRANTY
RoHS COMPLIANT
SUITABLE FOR DAMP LOCATIONS

ENERGY-EFFICIENT
LED
DOWNLIGHT CYLINDER

ORDER CONFIGURATOR

To order, select one option from each table column to configure the desired cylinder product catalog code. Then, fill in the boxes below (e.g., Cylinder #: CL602-30-10-LELV-AB-1).

CYLINDER #

CL602	-	30	-	10	-	LELV	-		-	1
CYLINDER MODEL		CCT		LUMENS		DIMMING		FINISH		VOLTAGE
☑**CL602**		☑**30** 3000K		☑**10** 1000 lm		☑**LELV** Flicker-Free TRIAC/ELV, 5% (120V Only)		☐**BK** Black (Painted) ☐**WH** White (Painted) ☐**AB** Antique Bronze (Painted) ☐**SL** Silver Gray (Painted)		☑**1** 120V

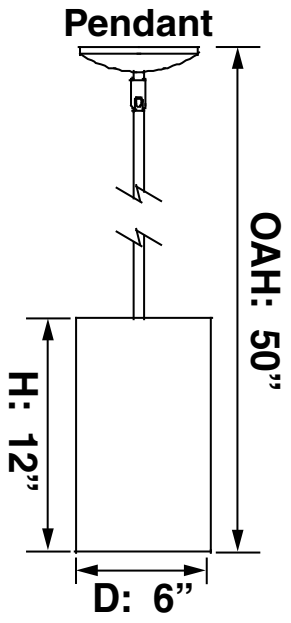

www.QuantaLight.com All rights reserved. Subject to change without notice.