









LED LIGHT ENGINE

WATTS/LUMENS:

30W/2000 lm (One 15W/1000 lm Uplight and FC FCC COMPLIANT One15W/1000 Im Downlight)

CRI: 80 **CCT:** 3000K BINNING: 3 SDCM

THERMAL MANAGEMENT: Passive LIFE (RATED): 50,000 hours based on LED testing per LM80-08 and projected values

from IESNA TM21-11.

LED DRIVER

OUTPUT POWER SUPPLY: Class II

POWER FACTOR (Pf): >.9

THD: <20%

INPUT VOLTAGE: 120V at 50/60 Hz

DIMMING:

TRIAC/ELV, 5% (120V AC Only)

CONSTRUCTION

HOUSING: Formed & Welded All-Aluminum FINISH:

- Powdercoat Paint Colors (4)
 - Black (BK)
 - White (WH)
 - Antique Bronze (AB)
 - Silver Gray (SL)

INSTALLATION

SIZE: 6" Dia. x 18" H x 83/4" E

MOUNTING: Surface wall mounting only. Mounting canopy assembly secures luminaire to wall-mounted junction box.

COMPLIANCES/WARRANTY

® cULus LISTED

2-YEAR LIMITED WARRANTY (2<u>vea</u>)

RoHS COMPLIANT

SUITABLE FOR WET LOCATIONS

0 **ENERGY-EFFICIENT**

LED LED

UPLIGHT/DOWNLIGHT CYLINDER



Catalog #:

Type:

Project:


Prepared By:

AT A GI ANCE

Fixed-position downlight cylinder state-of-the-art incorporating LED technology. Aperture 6". Offered as a surface wall mount fixture. Uplight and downlight configuration.

ORDER CONFIGURATOR

To order, select one option from each table column to configure the desired cylinder product catalog code. Then, fill in the boxes below (e.g., Cylinder #: CL604-30-20-LELV-AB-1).

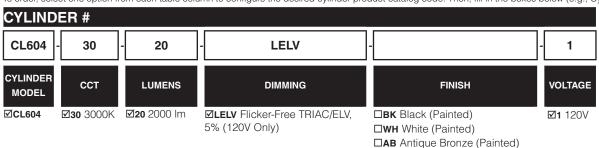

□SL Silver Gray (Painted) E: 83/4" **Surface Wall Mount 1**83 D: 6"