# uantaLight

() source () SYLAN FC works (%)

# RECESSED MULTIPLE



LIGHT SOURCES

FEATURES

- LED/INCANDESCENT COMPATIBILITY: PAR30 LED (75 Watts Max per Gimbal)
- PAR30 Incandescent (75 Watts Max per Gimbal)
- Lamps Sold Separately
- **EDISON BASE LAMPHOLDER:**
- Medium Base (E26)
- Replaceable PAR 30 LED Light Engine or PAR30 Halogen Bulb

**DIMMING:** Dimmable (Lamp Dependent) INPUT VOLTAGE: 120V at 60 Hz

# OPTICS

**GIMBAL AIMING:** Up to 45° tilt and up to 355° rotation in upper position. 90° horizontal aiming in lowest position.

#### INSTALLATION

#### CEILING:

- Accommodates Up to 1¼" Thickness
- Non-Type IC, Insulation to Be Kept 3" Away
- 81/8" x 16" Ceiling Cutout Size
- Maintenance Access from Above and
- **Below** Ceilina

### **MOUNTING:**

- Integrated Universal Mounting Brackets
- Advanced High-Strength Steel (AHSS)
- Hanger Bars (Sold Separately) (See Below)

#### J-BOX WIRING:

Integral Thru-Branch, 4 In/4 Out

#### COMPLIANCES/WARRANT ① cETLus LISTED

ENERGY STAR (CONSULT FACTORY)

 $\bigcirc$ LED

- FC FCC COMPLIANT
- **5-YEAR LIMITED WARRANTY** (Bran
- vконs **RoHS COMPLIANT**
- SUITABLE FOR DAMP LOCATIONS
- ٢ **ENERGY-EFFICIENT**
- LED LED COMPATIBLE
- 6 RECESSED DOWNLIGHT



Catalog #:


Prepared By:

# AT A GLANCE

Recessed, architectural downlight utilizina two double aimbals. Ideal for down and accent lighting in indoor spaces where performance and design matter. Internal medium-based sockets on two gimbals offer multiple lamp/ aiming angle options. For use with incandescent or LED PAR30 lamps with E26 base (lamps not supplied). 75W maximum per lamp. Precision-formed all steel housing. Aperture is 71/2" x 145%" and flanged with 3/4" wide trim. Overall trim dimensions are 95%" x 1634".

# ORDER CONFIGURATOR

To order, select one option from each table column to configure the desired recessed multiple product catalog code. Then, fill in the boxes below (e.g., Recessed Multiple #: MI22-WH-1). To order additional items (optional), up to one option from each table column can be selected from the Optional section. Then, fill in the dashed box(es).

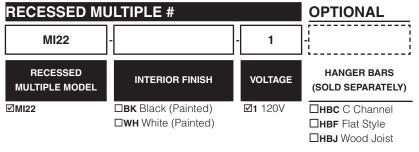

QUICK VIEW

