

RECESSED MULTIPLE















LED/INCANDESCENT COMPATIBILITY:

- PAR30 LED (75 Watts Max per Gimbal)
- PAR30 Incandescent (75 Watts Max per Gimbal)
- Lamps Sold Separately

EDISON BASE LAMPHOLDER:

- Medium Base (E26)
- Replaceable PAR 30 LED Light Engine or PAR30 Halogen Bulb

DIMMING: Dimmable (Lamp Dependent) INPUT VOLTAGE: 120V at 60 Hz

OPTICS

GIMBAL AIMING: Up to 45° tilt and up to 355° rotation in upper position. 90° horizontal aiming in lowest position.

INSTALLATION

CEILING:

- Accommodates Up to 1½" Thickness
- Non-Type IC, Insulation to Be Kept 3" Away
- 87/8" x 231/8" Ceiling Cutout Size
- Maintenance Access from Above and Below Ceilina

MOUNTING:

- Integrated Universal Mounting Brackets Advanced High-Strength Steel (AHSS)
- Hanger Bars (Sold Separately) (See Below)

J-BOX WIRING:

Integral Thru-Branch, 4 In/4 Out

COMPLIANCES/WARRANT

- CETLUS LISTED
- ENERGY STAR (CONSULT FACTORY)
- FC FCC COMPLIANT
- **5-YEAR LIMITED WARRANTY**
- **RoHS COMPLIANT**
- SUITABLE FOR DAMP LOCATIONS
- 0 **ENERGY-EFFICIENT**
- LED COMPATIBLE RECESSED DOWNLIGHT



Catalog #:

Type:

Project:


Prepared By:

AT A GI ANCE

Recessed, architectural downlight utilizing three double gimbals in series. Ideal for down and accent lighting in indoor spaces where performance and design matter. Internal medium-based sockets on three gimbals offer multiple lamp/ aiming angle options. For use with incandescent or LED PAR30 lamps with E26 base (lamps not supplied). 75W maximum per lamp. Precision-formed all steel housing. Aperture is 71/2" x 211/8" and flanged with 3/4" wide trim. Overall trim dimensions are 95%" x 237%".

ORDER CONFIGURATOR

To order, select one option from each table column to configure the desired recessed multiple product catalog code. Then, fill in the boxes below (e.g., Recessed Multiple #: MI23-WH-1). To order additional items (optional), up to one option from each table column can be selected from the Optional section. Then, fill in the dashed box(es).

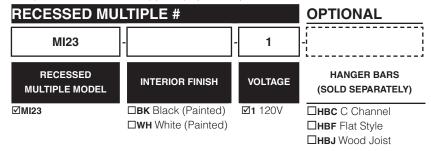

QUICK VIEW

