

FEATURES       

LED LIGHT ENGINE

WATTS/LUMENS: 20W/1100 lm, 25W/1500 lm, 30W/2000 lm, or 45W/3000 lm

CRI/CCT: 80/(2700K, 3000K, 3500K, or 4000K)

BINNING: 3 SDCM

THERMAL MANAGEMENT: Passive

LIFE (RATED): 50,000 hours based on LED testing per LM80-08 and projected values from IESNA TM21-11.

REFLECTOR

DESIGN:

Self-Flanged, Two-Piece Construction

FINISH/COLORS/TRIM:

Painted (Black or White) or Anodized (Clear, Haze, or Wheat); Painted White Flange Trim or Non-Painted Flange Trim Available

PRODUCTION PROCESS:

CNC Precision-Spun

MATERIAL: Specification-Grade Aluminum Alloy, .060" Thick

LED DRIVER

OUTPUT POWER SUPPLY: Class II

POWER FACTOR (Pf): >.9

THD: <20%

INPUT VOLTAGE: 120V/277V at 50/60 Hz

DIMMING:

* TRIAC/ELV, 5% (120V AC Only) * 0-10V, 10% (120V/277V) (See Dimming Below)

OPTICS

BEAM ANGLES: 15°, 24°, 38°, or 60°

INSTALLATION




CEILING:


- Accommodates Up to 1¼" Thickness
- Non-Type IC, Insulation to Be Kept 3" Away
- 6½" Ceiling Cutout Size
- Maintenance Access from Above and Below Ceiling

J-BOX WIRING:

Integral Thru-Branch, 4 In/4 Out

COMPLIANCES/WARRANTY

-  **cETLus LISTED**
-  **ENERGY STAR (CONSULT FACTORY)**
-  **FCC COMPLIANT**
-  **5-YEAR LIMITED WARRANTY**
-  **RoHS COMPLIANT**
-  **SUITABLE FOR DAMP LOCATIONS**
-  **ENERGY-EFFICIENT**
-  **LED**
-  **RECESSED DOWNLIGHT**

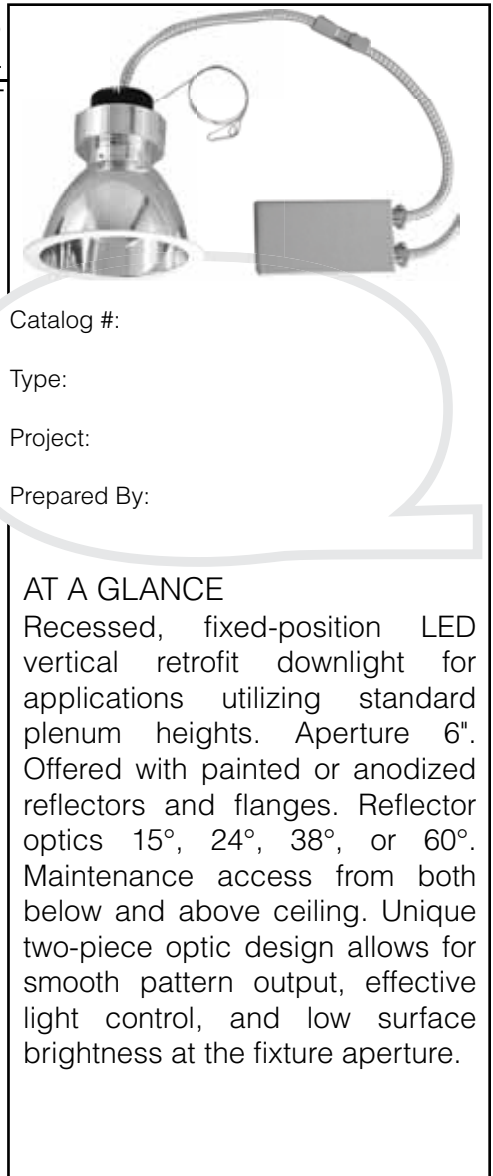

Catalog #:

Type:

Project:

Prepared By:

AT A GLANCE

Recessed, fixed-position LED vertical retrofit downlight for applications utilizing standard plenum heights. Aperture 6". Offered with painted or anodized reflectors and flanges. Reflector optics 15°, 24°, 38°, or 60°. Maintenance access from both below and above ceiling. Unique two-piece optic design allows for smooth pattern output, effective light control, and low surface brightness at the fixture aperture.

ORDER CONFIGURATOR

To order, select one option from each table column to configure the desired reflector/trim and remote power supply product catalog code. Then, fill in the boxes below (e.g., Reflector/Trim #: 6011-35-15-38-HZ-SF, Remote Power Supply #: RPS-25-LUTEKO). Lumens must match corresponding wattage value (e.g., if 15 1500 lm, then 25 25W).

REFLECTOR/TRIM

6011					
R/T MODEL	COLOR TEMPERATURE	LUMENS	OPTICS	REFLECTOR FINISH/COLOR	FLANGE
<input checked="" type="checkbox"/> 6011	<input type="checkbox"/> 27 2700K <input type="checkbox"/> 30 3000K <input type="checkbox"/> 35 3500K <input type="checkbox"/> 40 4000K	<input type="checkbox"/> 11 1100 lm (<input checked="" type="checkbox"/> 20 20W Only) <input type="checkbox"/> 15 1500 lm (<input checked="" type="checkbox"/> 25 25W Only) <input type="checkbox"/> 20 2000 lm (<input checked="" type="checkbox"/> 30 30W Only) <input type="checkbox"/> 30 3000 lm (<input checked="" type="checkbox"/> 45 45W Only)	<input type="checkbox"/> 15 15° <input type="checkbox"/> 24 24° <input type="checkbox"/> 38 38° <input type="checkbox"/> 60 60°	<input type="checkbox"/> BK Black (Painted) <input type="checkbox"/> WH White (Painted) <input type="checkbox"/> CL Clear (Anodized) <input type="checkbox"/> HZ Haze (Anodized) <input type="checkbox"/> WT Wheat (Anodized)	<input type="checkbox"/> SF Self-Flanged <input type="checkbox"/> SW Self-Flanged (With Painted White Trim)

REMOTE POWER SUPPLY

RPS		
RPS MODEL	RPS WATTAGE	DIMMING
<input checked="" type="checkbox"/> RPS	<input type="checkbox"/> 20 20W (<input checked="" type="checkbox"/> 11 1100 lm Only) <input type="checkbox"/> 25 25W (<input checked="" type="checkbox"/> 15 1500 lm Only) <input type="checkbox"/> 30 30W (<input checked="" type="checkbox"/> 20 2000 lm Only) <input type="checkbox"/> 45 45W (<input checked="" type="checkbox"/> 30 3000 lm Only)	<input type="checkbox"/> LELV Flicker-Free TRIAC/ELV, 5% (120V Only) <input type="checkbox"/> L010 0 to 10V Dimming, 10% <input type="checkbox"/> LUTIII Lutron Hi-Lume, 1% <input type="checkbox"/> LUTEKO Lutron Ecosystem, 1%

QUICK VIEW

