

FEATURES        

LED LIGHT ENGINE

WATTS/LUMENS: 60W/3990 lm
CRI/CCT: 80/3000K
BINNING: 3 SDCM
THERMAL MANAGEMENT: Passive
LIFE (RATED): 50,000 hours based on LED testing per LM80-08 and projected values from IESNA TM21-11.

OPTICS

BEAM ANGLES: Wide Flood
ADJUSTABLE/LOCKABLE HORIZONTAL AIMING: Up to 90° tilt from vertical axis and up to 355° rotation around vertical axis. Screw-in side knobs allow for lockable 180° horizontal aiming in lowest position.
DESIGN: Unique Integral Construction
FINISH/COLORS: Anodized (Clear)
PRODUCTION PROCESS: CNC Precision-Spun
MATERIAL: Specification-Grade Aluminum Alloy, .060" Thick

INSTALLATION

MOUNTING:









- Mounts to 120V AC *QuantaLight* Track Systems
 - TSQ1: 1-Circuit/1-Neutral (1C1N)
 - TSQ2: 2-Circuit/1-Neutral (2C1N)
 - TEK4: 2-Circuit/2-Neutral (2C2N)
- Mounts to 1-Circuit or 2-Circuit Track System Platforms and Canopies


ADAPTERS: Listed Components

LED DRIVER

OUTPUT POWER SUPPLY: Class II
POWER FACTOR (Pf): >.9
THD: <20%
INPUT VOLTAGE: 120V at 50/60 Hz (System Adapter Dependant)
DIMMING: TRIAC/ELV 5% dimmable on the input primary, line-side circuit of the track system. Consult dimmer manufacturer for compatibility and conditions of use.

COMPLIANCES/WARRANTY

 **cETLus LISTED**
 **ENERGY STAR (CONSULT FACTORY)**
 **FCC COMPLIANT**
 **5-YEAR LIMITED WARRANTY**
 **RoHS COMPLIANT**
 **ENERGY-EFFICIENT**
 **LED**
 **DRY LOCATIONS ONLY**

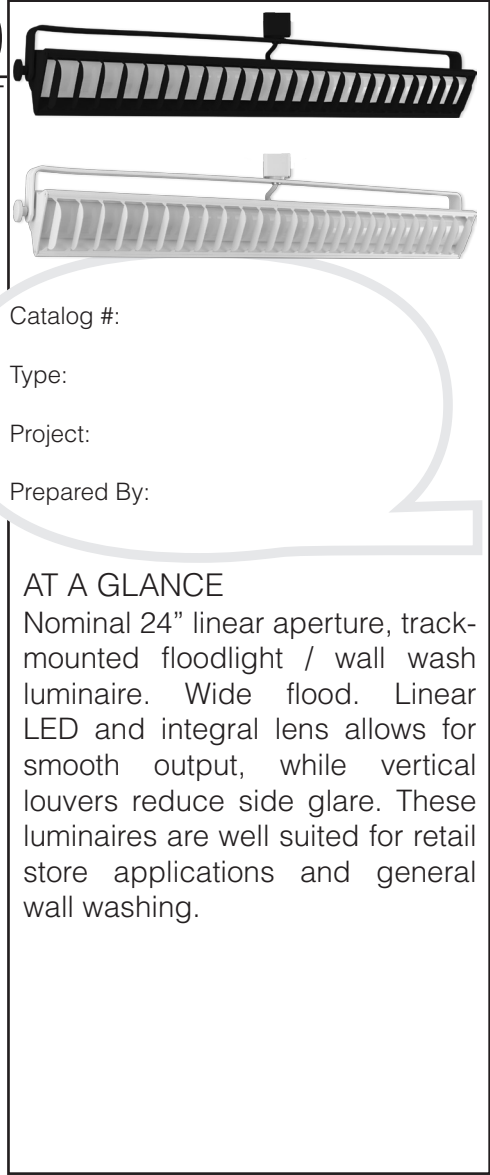

Catalog #:

Type:

Project:

Prepared By:

AT A GLANCE


Nominal 24" linear aperture, track-mounted floodlight / wall wash luminaire. Wide flood. Linear LED and integral lens allows for smooth output, while vertical louvers reduce side glare. These luminaires are well suited for retail store applications and general wall washing.

ORDER CONFIGURATOR

To order, select one option from each table column to configure the desired track floodlight product catalog code. Then, fill in the boxes below (e.g., Track Floodlight #: TL360-TEK100-30-40-WF-WH).

TRACK FLOODLIGHT #						
TL360		30	40	WF		
TF MODEL	TRACK ADAPTER	CCT	LUMENS	OPTICS	FINISH	
<input checked="" type="checkbox"/> TL360	<input type="checkbox"/> Q2 1C1N & 2C1N (120V) Track Adapter <input type="checkbox"/> TEK100 2C2N (120V) Track Adapter	<input checked="" type="checkbox"/> 30 3000K	<input checked="" type="checkbox"/> 40 3990 lm	<input checked="" type="checkbox"/> WF Wide Flood	<input type="checkbox"/> BK Black (Painted) <input type="checkbox"/> WH White (Painted)	

QUICK VIEW WITH Q2 ADAPTER

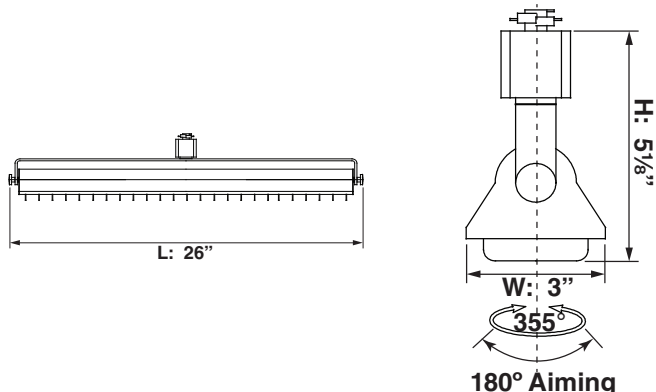

WITH TEK100 ADAPTER

