


FEATURES       



**LED LIGHT ENGINE**   
**WATTS/LUMENS:** 7W/550 lm or 13W/950 lm  
**CRI/CCT:** 80/3000K  
**BINNING:** 3 SDCM  
**THERMAL MANAGEMENT:** Passive  
**LIFE (RATED):** 50,000 hours based on LED testing per LM80-08 and projected values from IESNA TM21-11.

**OPTICS**  
**BEAM ANGLES:** 25°  
**ADJUSTABLE/HORIZONTAL AIMING:** Up to 90° tilt from vertical axis and up to 355° rotation around vertical axis. 180° horizontal aiming in lowest position.  
**DESIGN:** Unique Integral Construction  
**FINISH/COLORS:** Anodized (Clear)  
**PRODUCTION PROCESS:** CNC Precision-Spun  
**MATERIAL:** Specification-Grade Aluminum Alloy, .060" Thick

**INSTALLATION**  
**MOUNTING:**  
 ▪ Mounts to 120V AC *QuantaLight* Track System  
   ▫ TSQ1: 1-Circuit/1-Neutral (1C1N)  
 ▪ Mounts to 1-Circuit Track System Platforms and Canopies  
**ADAPTERS:** Listed Components

**LED DRIVER**  
**OUTPUT POWER SUPPLY:** Class II  
**POWER FACTOR (Pf):** >.9  
**THD:** <20%  
**INPUT VOLTAGE:** 120V at 50/60 Hz (System Adapter Dependant)  
**DIMMING:** TRIAC/ELV 5% dimmable on the input primary, circuit of the track system. Consult dimmer manufacturer for compatibility and conditions of use.

**COMPLIANCES/WARRANTY**  
 **cETLus LISTED**  
 **FCC COMPLIANT**  
 **5-YEAR LIMITED WARRANTY**  
 **RoHS COMPLIANT**  
 **ENERGY-EFFICIENT**  
 **LED**  
 **DRY LOCATIONS ONLY**

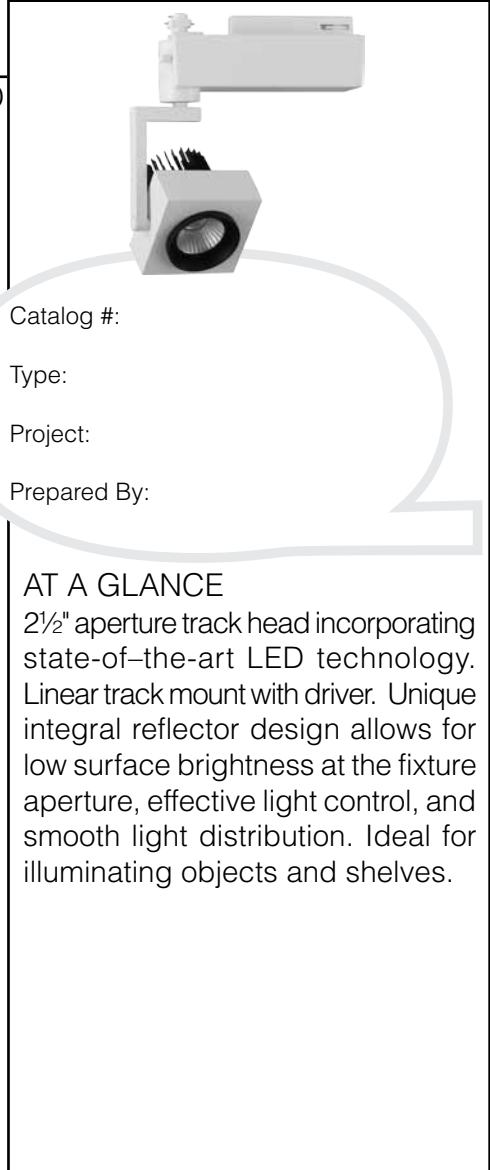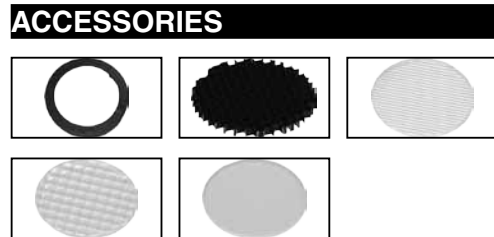

Catalog #:

Type:

Project:

Prepared By:

**AT A GLANCE**  
 2½" aperture track head incorporating state-of-the-art LED technology. Linear track mount with driver. Unique integral reflector design allows for low surface brightness at the fixture aperture, effective light control, and smooth light distribution. Ideal for illuminating objects and shelves.

## ORDER CONFIGURATOR

To order, select one option from each table column to configure the desired track head product catalog code. Then, fill in the boxes below (e.g., Track Head #: TL531-Q2-30-10-25-WH).

TRACK HEAD #						OPTIONAL
TL531	Q2	30		25	WH	
TH MODEL	TRACK ADAPTER	COLOR TEMPERATURE	LUMENS	OPTICS	FINISH	ACCESSORIES (SOLD SEPARATELY)
<input checked="" type="checkbox"/> TL531	<input checked="" type="checkbox"/> Q2 1C1N & 2C1N (120V) Track Adapter	<input checked="" type="checkbox"/> 30 3000K	<input type="checkbox"/> 06 550 lm <input type="checkbox"/> 10 950 lm	<input checked="" type="checkbox"/> 25 25°	<input checked="" type="checkbox"/> WH White (Painted)	<input type="checkbox"/> CVS Lens Holder <input type="checkbox"/> HCS Honeycomb Louver <input type="checkbox"/> DF1S Beam Elongator <input type="checkbox"/> DF2S Prismatic Lens <input type="checkbox"/> DF3S Soft Focus Lens

## QUICK VIEW

