


TEK4 Connectors & Accessories

TEK11 / TEK12



END FEED
(11 LEFT/12 RIGHT POLARITY)

TEK14



CENTER FEED

TEK21




MINI-STRAIGHT CONNECTOR

TEK24




ADJUSTABLE CONNECTOR

TEK34




"L" CONNECTOR (90°)

TEK38



"X" CONNECTOR

TEK39 / TEK40



"T" CONNECTOR
(39 RIGHT/40 LEFT POLARITY)

TEK11CB / TEK12CB



CURRENT LIMITER END FEED
(11CB LEFT/12CB RIGHT POL.)

TEK100



120V ADAPTER

GES15



OUTLET BOX COVER

TEK41



DEAD END

XTSV12



CONDUCTOR BENDING TOOL

SKB10




CEILING MOUNTING BRACKET

SKB12



FLUSH TILE MOUNTING BRACKET

SKBX12




DROP TILE MOUNTING BRACKET

SKB30




CEILING CUP KIT

SKB34



CABLE SUSPENSION KIT

SPUS-12 / SPUS-18 / SPUS-24 / SPUS-48

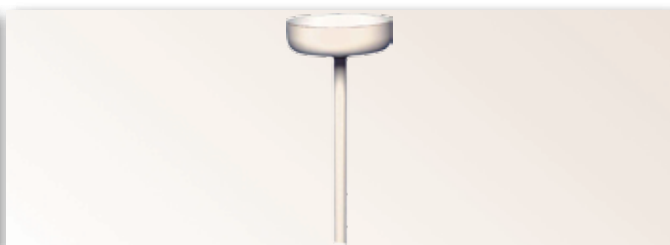

STEM KIT
(12" / 18" / 24" / 48")

SP4P



STEM KIT 48" UNIVERSAL SUSPENSION COUPLER

QLUXE SPECIFICATION-GRADE | ARCHITECTURAL | TRACK | TRACK SYSTEMS | 2-CIRCUIT/2-NEUTRAL | 120V | TEK4 Connectors & Accessories

ELECTRICAL

INDEPENDENT NEUTRALS:

Enable larger power capacity (2 x 20A) and dimming capability. Dim on two independent circuits without harmonics or interference on the neutral conductor.

OVERSIZED CONDUCTORS:

Higher operating safety and reduced overload potential.

POLARITY RIDGE IDENTIFIER:

Enables connector and track system alignment during installation.

CONSTRUCTION

HOUSING:

Rugged, heavy gauge extruded aluminum channel linear housing.

EXTRUSION: Fixtures supported by aluminum track extrusion to provide maximum weight bearing capacity and ensure reliable contact with electrical conductors.

INSTALLATION

LINEAR/GRID CONFIGURATIONS:

May be installed in linear or grid configurations.

FIELD-CUTTABLE TRACK SECTIONS:

Track sections can be cut in the field. Conductors of field cut track sections must be bent using XTSV12 Bending Tool to ensure proper electrical connections.

COMPLIANCES/WARRANTY

cULus LISTED


TITLE 24: Current limiting feeds approved by the California Energy Commission to meet the requirements of Title 24. Current limiting feeds comply with ASHRAE90.1 and IECC Section 805.5.1.4 for track current limiting.

5-YEAR LIMITED WARRANTY

RoHS COMPLIANT

DRY LOCATIONS ONLY

*TEK4 Track Systems, Connectors, & Accessories
Also Available in Black

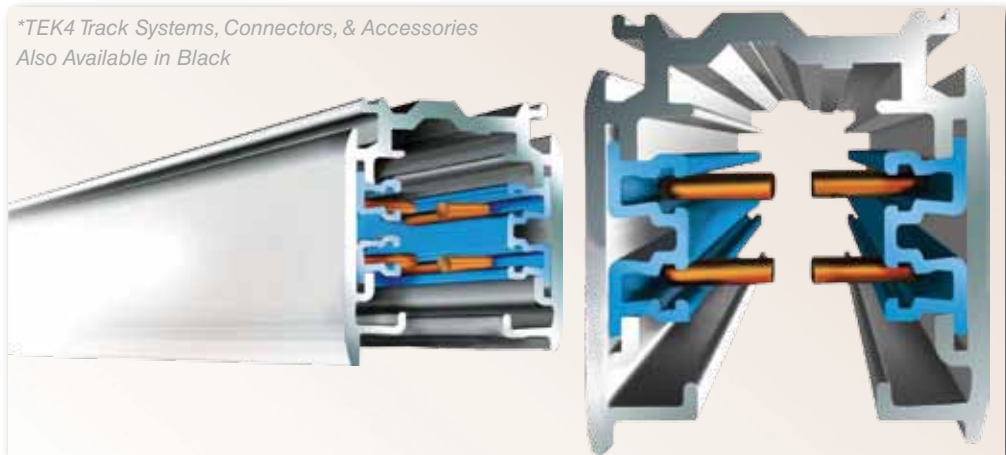

TRACK SYSTEM

MODEL TEK4

LENGTH
 04 4 Ft.
 08 8 Ft.
 12 12 Ft.

FINISH
 BK Black (Painted)
 WH White (Painted)

VOLTAGE 1 120V

CONNECTORS (SOLD SEPARATELY)


- TEK11 End Feed (Left Polarity)
- TEK12 End Feed (Right Polarity)
- TEK14 Center Feed
- TEK21 Mini-Straight Connector
- TEK24 Adjustable Connector
- TEK34 "L" Connector (90°)
- TEK38 "X" Connector
- TEK39 "T" Connector (Right Polarity)
- TEK40 "T" Connector (Left Polarity)
- TEK11CB Current Limiter End Feed (Left Polarity)
- TEK12CB Current Limiter End Feed (Right Polarity)
- TEK100 120V Adapter

ACCESSORIES (SOLD SEPARATELY)

- GES15 Outlet Box Cover
- TEK41 Dead End
- XTSV12 Conductor Bending Tool
- SKB10 Ceiling Mounting Bracket
- SKB12 Flush Tile Mounting Bracket
- SKBX12 Drop Tile Mounting Bracket
- SKB30 Ceiling Cup Kit
- SKB34 Cable Suspension Kit
- SPUS-12 Stem Kit 12"
- SPUS-18 Stem Kit 18"
- SPUS-24 Stem Kit 24"
- SPUS-48 Stem Kit 48"
- SP4P Stem Kit 48" Universal Suspension Coupler




QUICK VIEW

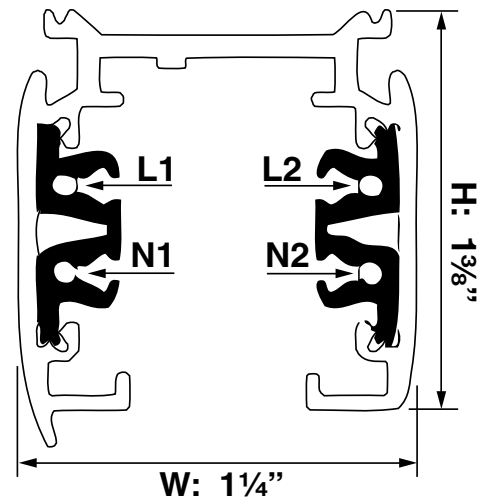

HTEK4 Connectors & Accessories

QLUXE SPECIFICATION-GRADE | ARCHITECTURAL | TRACK | TRACK SYSTEMS | 2-CIRCUIT/2-NEUTRAL | 277V | HTEK4 Connectors & Accessories

HTEK11 / HTEK12

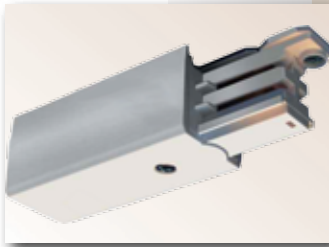

**END FEED
(11 LEFT/12 RIGHT POLARITY)**

HTEK14




CENTER FEED

HTEK21




**MINI-STRAIGHT
CONNECTOR**

HTEK24




ADJUSTABLE CONNECTOR

HTEK34




"L" CONNECTOR (90°)

HTEK38



"X" CONNECTOR

HTEK39 / HTEK40



**"T" CONNECTOR
(39 RIGHT/40 LEFT POLARITY)**

HTEK11CB / HTEK12CB



**CURRENT LIMITER END FEED
(11CB LEFT/12CB RIGHT POL.)**

HTEK100



277V ADAPTER

GES15



OUTLET BOX COVER

TEK41



DEAD END

XTSV12



CONDUCTOR BENDING TOOL

SKB10




**CEILING
MOUNTING BRACKET**

SKB12



**FLUSH TILE
MOUNTING BRACKET**

SKBX12



**DROP TILE
MOUNTING BRACKET**

SKB30



CEILING CUP KIT

SKB34



CABLE SUSPENSION KIT

SPUS-12 / SPUS-18 / SPUS-24 / SPUS-48



**STEM KIT
(12" / 18" / 24" / 48")**

SP4P



**STEM KIT 48" UNIVERSAL
SUSPENSION COUPLER**

ELECTRICAL

INDEPENDENT NEUTRALS:

Enable larger power capacity (2 x 20A) and dimming capability. Dim on two independent circuits without harmonics or interference on the neutral conductor.

OVERSIZED CONDUCTORS:

Higher operating safety and reduced overload potential.

POLARITY RIDGE IDENTIFIER:

Enables connector and track system alignment during installation.

STANDARD HTEK 277V TRACK FIXTURES NOT DIMMABLE

CONSTRUCTION

HOUSING:

Rugged, heavy gauge extruded aluminum channel linear housing.

EXTRUSION: Fixtures supported by aluminum track extrusion to provide maximum weight bearing capacity and ensure reliable contact with electrical conductors.

INSTALLATION

LINEAR/GRID CONFIGURATIONS:

May be installed in linear or grid configurations.

FIELD-CUTTABLE TRACK SECTIONS:

Track sections can be cut in the field. Conductors of field cut track sections must be bent using XTSV12 Bending Tool to ensure proper electrical connections.

COMPLIANCES/WARRANTY

cULus LISTED


TITLE 24: Current limiting feeds approved by the California Energy Commission to meet the requirements of Title 24. Current limiting feeds comply with ASHRAE90.1 and IECC Section 805.5.1.4 for track current limiting.

5-YEAR LIMITED WARRANTY

RoHS COMPLIANT

DRY LOCATIONS ONLY

*HTEK4 Track Systems, Connectors, & Accessories
Also Available in Black

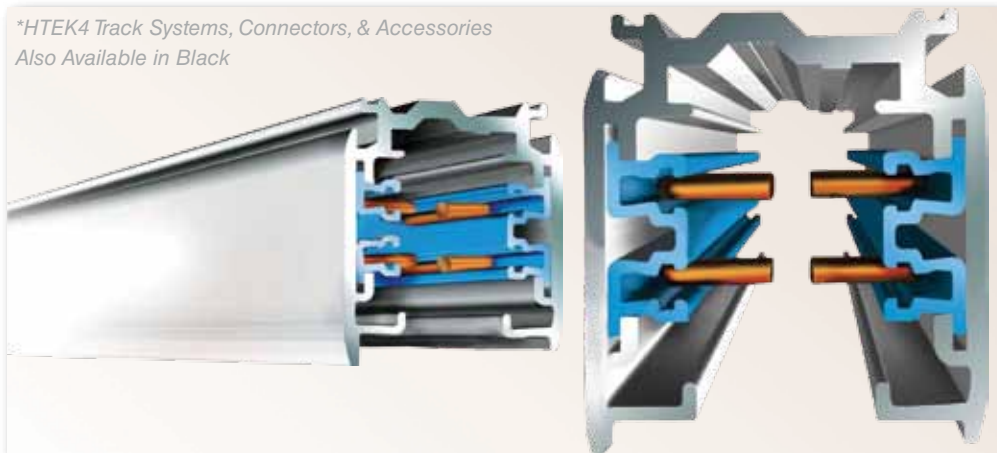

TRACK SYSTEM

HTEK4

04 4 Ft.

08 8 Ft.

12 12 Ft.

BK Black (Painted)

WH White (Painted)

2 277V

HTEK11

(SOLD SEPARATELY) End Feed (Left Polarity)

HTEK12

End Feed (Right Polarity)

HTEK14

Center Feed

HTEK21

Mini-Straight Connector

HTEK24

Adjustable Connector

HTEK34 "L" Connector (90°)

HTEK38 "X" Connector

HTEK39

"T" Connector (Right Polarity)

HTEK40

"T" Connector (Left Polarity)

HTEK11CB

Current Limiter End Feed (Left Polarity)

HTEK12CB

Current Limiter End Feed (Right Polarity)

HTEK100

277V Adapter

GES15

Outlet Box Cover

TEK41

Dead End

XTSV12

Conductor Bending Tool

SKB10

Ceiling Mounting Bracket

SKB12

Flush Tile Mounting Bracket

SKBX12

Drop Tile Mounting Bracket

SKB30

Ceiling Cup Kit

SKB34

Cable Suspension Kit

SPUS-12

Stem Kit 12"

SPUS-18

Stem Kit 18"

SPUS-24

Stem Kit 24"

SPUS-48

Stem Kit 48"

SP4P

Stem Kit 48" Universal

Suspension Coupler



QUICK VIEW

